



MRF

PRECURED TREAD RUBBER
CATALOGUE



The MRF logo is displayed in a bold, white, sans-serif font. The letters 'MRF' are stacked vertically, with 'M' on top, 'R' in the middle, and 'F' on the bottom. The 'M' has a small horizontal bar extending from its right side.



MRF Limited, India's No.1 Tyre Company, produces world-class tyres that have today achieved recognition and preference among customers across the globe.

This position of leadership has been achieved through our commitment to offer quality products and maximum value to the end user.

We have also built a substantial Image in the Retreading Business with a range of Precured Tread Rubber that we manufacture at our plants in India and Sri Lanka.

Retreading business across the globe is growing steadily and MRF is committed to serving this segment through a comprehensive range of high quality patterns that meet the demands of various applications and markets.

This Precured Tread Rubber Catalogue gives you information on the various patterns in our range along with their salient features to enable you to choose the right pattern and size for your requirements.

STANDARD LOAD OPERATION

BIAS CASINGS	RADIAL CASINGS
RIB	MXA1
MXB	SSR
MXA2	RRE
MX3	RR
WRR	RLB
RHW	WRR
SUPER RIB	RHW
SL	SLR
	SUPER RIB
	GSLR

OVERLOAD OPERATION

BIAS CASINGS

RIB 195
SL
MX3
MXB

RADIAL CASINGS

SLR
WRR
RHW
RLB
GSLR






TIPPER OPERATION

BIAS CASINGS	RADIAL CASINGS
SLR	SLR
WRR	WRR
RHW	RHW
	RLB

TRAILER OPERATION

BIAS CASINGS	RADIAL CASINGS
RIB	MXA1
SUPER RIB	WRR
SL	RHW
SLR	SLR
MXA2	SUPER RIB
MXB	RR
	RRE
	MXA2
	GSLR



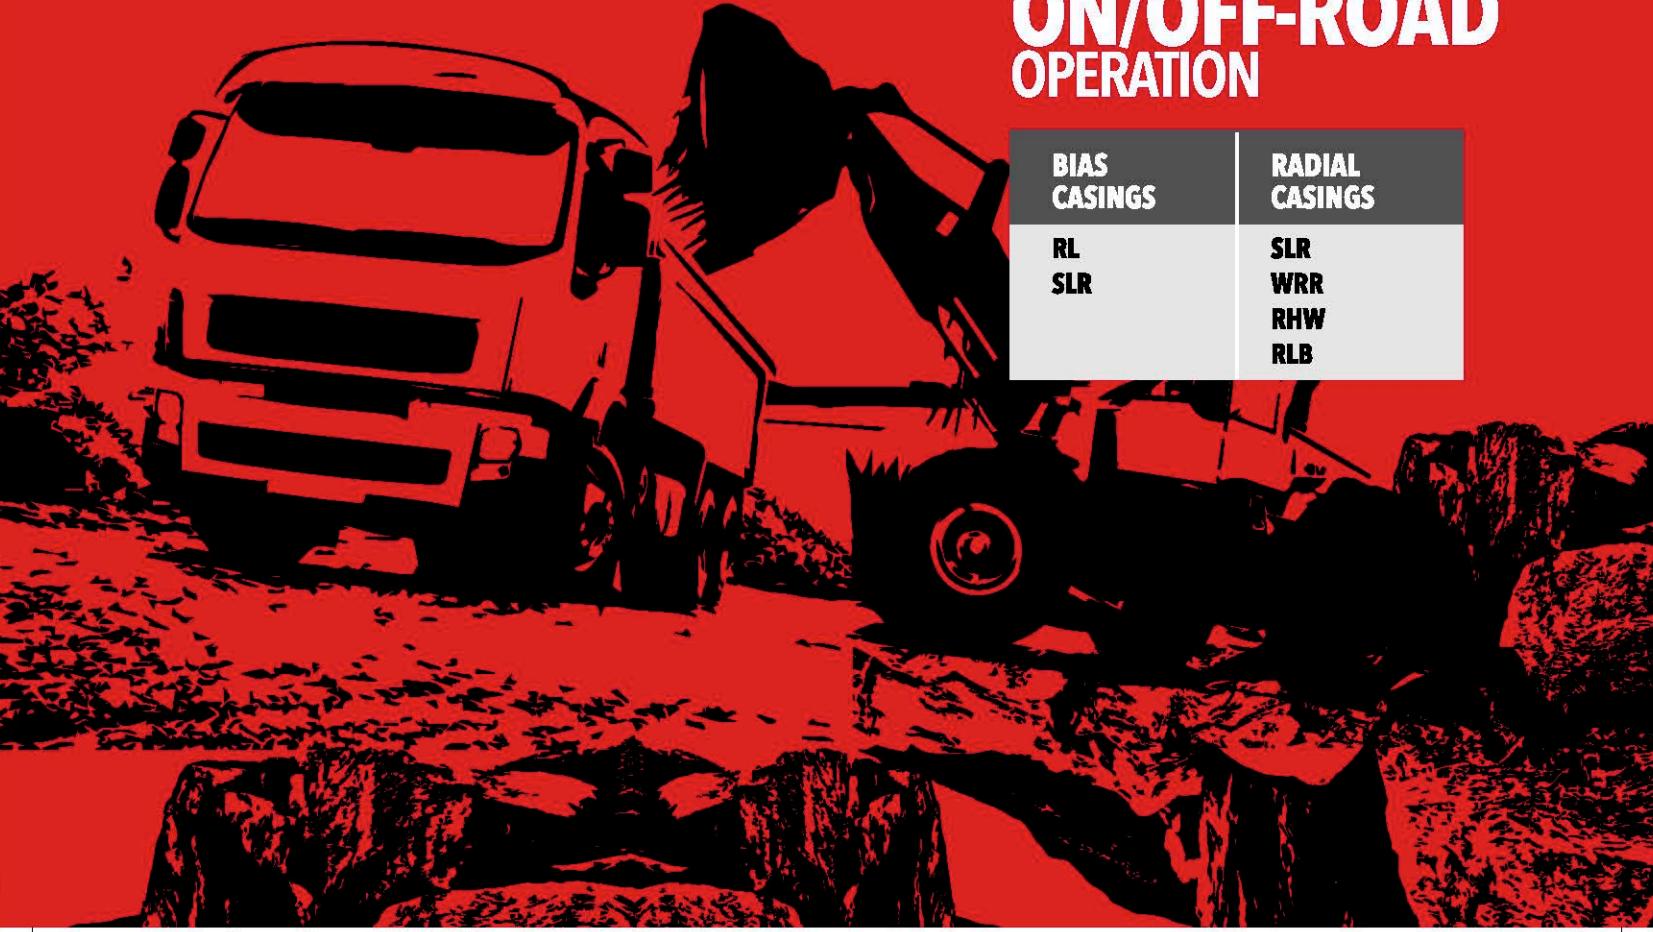

ON/OFF-ROAD OPERATION

BIAS
CASINGS

RL
SLR

RADIAL
CASINGS

SLR
WRR
RHW
RLB



BUS OPERATION


BIAS CASINGS	RADIAL CASINGS
RIB	RHW
RIB 195	WRR
SUPER RIB	RR
SL	RRE
MXA2	SSR
MXB	MXA1
KRL	GSLR

MXA1

TRUCK/BUS

- Unique free-rolling Rib pattern
- Specially designed for grip and mileage
- Cooler running
- Ideally suited for all-wheel position
- Suitable for highway operations
- Resistance against stone-trapping
- Pattern minimizes malwear

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
MXA1 203	203	14.60	17.30	3.48
MXA1 210	210	14.60	17.50	3.54
MXA1 220	220	14.60	17.40	3.73
MXA1 230	230	14.60	17.50	3.89
MXA1 240	240	14.60	17.50	4.07
MXA1 250	250	14.70	17.40	4.33

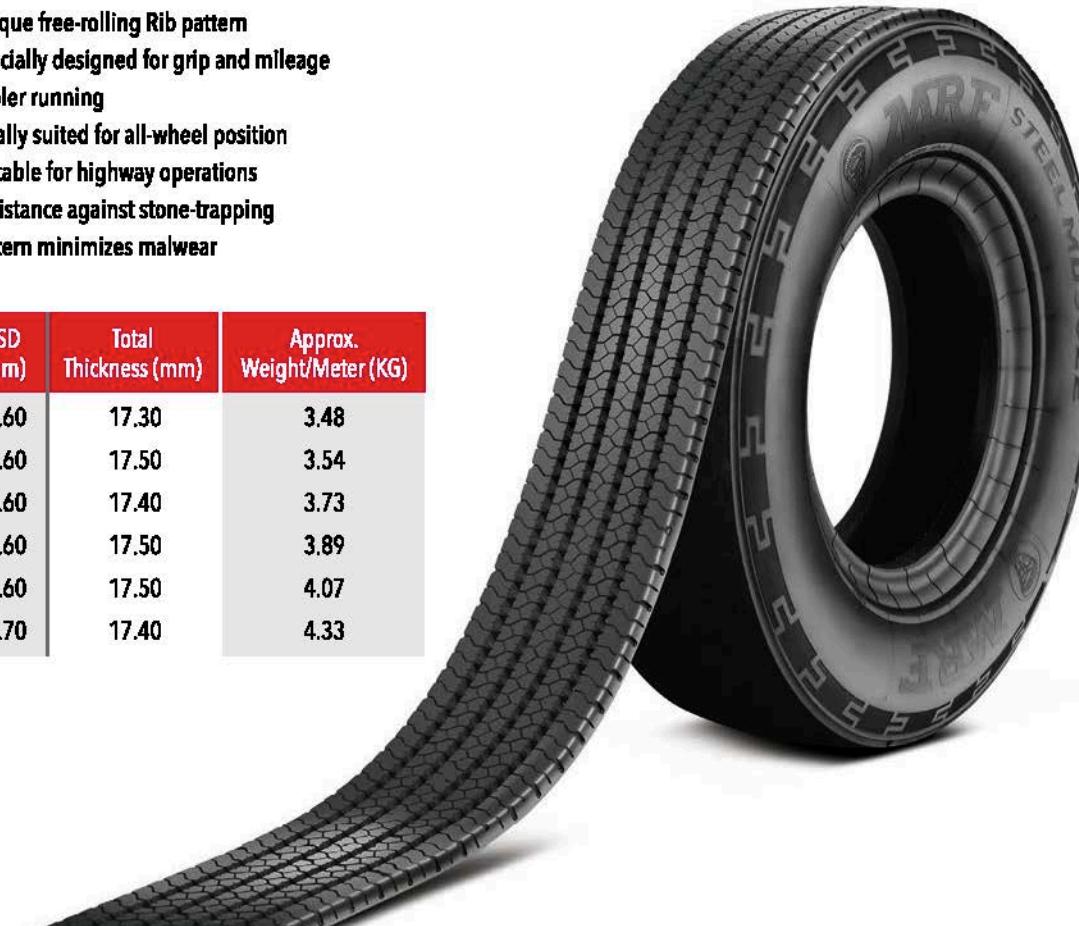

MXA2

TRUCK/BUS

- Specially designed for grip and mileage
- Cooler running
- Ideally suited for all-wheel position
- Resistance against stone-trapping

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
MXA2 203	203	14.50	17.20	3.43
MXA2 210	210	14.50	17.10	3.61
MXA2 220	220	14.60	17.30	3.81
MXA2 230	230	14.70	17.50	3.99
MXA2 240	240	14.60	17.30	4.16





RR

TRUCK/BUS

- Designed for truck and bus radials
- Aesthetic design with sipes
- Outstanding four-Rib pattern for all-wheel position
- Superior mileage and free-rolling pattern

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
RR 102	205	13.00	16.00	3.41
RR 103	215	13.00	16.00	3.55
RR 104	220	13.00	16.00	3.77
RR 105	225	13.00	16.00	3.86
RR 106	235	13.00	16.00	3.95





RRE

TRUCK/BUS

- Designed for truck and bus radials
- Aesthetic design with sipes
- Outstanding four-Rib pattern for all-wheel position
- Superior mileage and free-rolling pattern

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
RRE 102	205	10.00	13.00	2.83
RRE 103	215	10.00	13.00	2.98
RRE 104	220	10.00	13.00	3.05
RRE 105	225	10.00	13.00	3.13
RRE 106	235	10.00	13.00	3.28





SSR

TRUCK/BUS

- Ideal for radial tyres
- Aesthetic design with distinctive sipes
- Unique five-Rib pattern for all-wheel position

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
SSR 117	240	15.50	19.00	4.51





RHW

TRUCK/BUS

- All-wheel position pattern
- High mileage and stability
- Combined short haul and on/off-road applications
- Optional usage for highway operations

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
RHW 102E	205	14.50	18.00	3.61
RHW 102LE	210	14.50	18.00	3.78
RHW 103E	215	14.50	18.00	3.82
RHW 104	219	13.50	16.00	3.48
RHW 104LE	220	14.50	18.00	3.95
RHW 105E	230	14.50	18.00	4.14
RHW 113E	220	14.50	18.00	3.95
RHW 115E	230	14.50	18.00	4.14
RHW 124E	225	14.50	18.00	4.02
RHW 125E	230	14.50	18.00	4.07
RHW 126E	240	14.50	18.00	4.14
RHW 119	250	14.50	18.00	4.50





WRR

TRUCK/BUS

- All-wheel position pattern
- High mileage and stability
- Combined short haul and on/off-road applications
- Optional usage for highway operations
- Good resistance against stone-trapping

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
WRR 102	210	15.50	19.00	3.73
WRR 103	215	15.50	19.00	3.74
WRR 113	220	15.50	19.00	3.91
WRR 115	230	15.50	19.00	4.17
WRR 240	240	14.50	18.00	4.06
WRR 250	250	14.50	18.00	4.18





GSLR

TRUCK/BUS

- Aggressive look
- Good traction with better grip
- Ideally suited for rear wheel

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
GSLR 215	215	13.50	16.50	3.14
GSLR 220	220	13.50	16.50	3.19
GSLR 230	230	13.00	16.00	3.29





SLR

TRUCK/BUS

- Aggressive look
- Good traction with better road grip
- Ideally suited for rear wheel
- Optimized pattern for buses and trucks

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
SLR 104+	225	16.50	20.50	4.33
SLR 106+	235	16.50	20.50	4.74
SLR 301+	300	16.50	20.50	5.40





RLB

TRUCK/BUS

- Cross over block design with open shoulder
- For short haul and on/off-road usage
- Very good traction and ideally suited for drive axle fitment

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
RLB 103+	215	16.50	20.50	4.25
RLB 103+HL	215	16.50	20.50	4.26
RLB 113+	220	16.50	20.50	4.37
RLB 115+	230	16.50	20.50	4.52
RLB 124+	225	16.50	20.50	4.46
RLB 125+	230	16.50	20.50	4.60
RLB 126+	240	16.50	20.50	4.71





RIB

TRUCK/BUS

- Unique free-rolling Rib pattern
- Versatile design for all-wheel operation
- Suitable for highway operations
- Suitable for Bias casing

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
RIB 90E	170	12.00	15.00	2.59
RIB 91	178	12.00	15.00	2.69
RIB 92	185	13.50	16.50	3.12
RIB 93	194	13.00	16.00	3.12
RIB 101	195	13.50	16.50	3.33
RIB 102L	205	13.50	16.50	3.58
RIB 103	215	13.50	17.50	3.82
RIB 104L	220	13.50	16.50	3.69
RIB 111E	210	13.50	16.50	3.48
RIB 112E	215	13.50	16.50	3.57



RIB 195

TRUCK/BUS

- Universal free-rolling pattern
- Super thick under tread
- Performs well under the most extreme conditions
- Versatile design for all-wheel position

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
RIB 195	195	12.50	16.00	3.10



SUPER RIB

TRUCK/BUS

- Aesthetic design with sipes
- An outstanding Rib pattern for all-wheel position
- Delivers superior mileage with penetration resistance
- Saw-tooth pattern with wide contoured shoulder ribs

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
SUP RIB 94	195	14.50	18.50	3.70
SUP RIB 102	205	14.50	18.50	3.84
SUP RIB 103	215	14.50	18.50	3.92



SL DT71

TRUCK/BUS

- Aggressive traction design
- Thick cross overs
- Ideally suited for rear wheel
- Balanced on and off-road performance
- Lugs designed for cooler running

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
SL92 DT71	185	14.50	17.50	3.16
SL101 DT71	195	14.50	17.50	3.30
SL102 DT71	205	14.50	17.50	3.51





MXB

TRUCK/BUS

- Excellent traction
- Maximized for cooler running
- Less prone to cutting and chipping
- Ideally suited for rear wheel

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
MXB 195	195	14.80	18.80	3.68



MX3

TRUCK/BUS

- Specially designed highway pattern for extra mileage
- Excellent traction
- Maximised for cooler running
- Less prone to cutting and chipping
- Dependable, aggressive and open tread design

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
MX3 195	193	13.80	15.90	2.97
MX3 205	204	13.80	15.90	3.16





KRL

TRUCK/BUS

- Unique free-rolling pattern
- Versatile design for all-wheel operation
- Suitable for highway operations
- Suitable for Bias and Radial casings

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
KRL194	194	14.50	18.00	3.21
KRL205	205	14.50	18.00	3.45





RIB

LCV

- Universal free-rolling Rib Pattern
- Designed for higher mileage
- Versatile design for all-wheel operation
- Suitable for Bias and Radial casings

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
RIB 60	120	10.50	13.50	1.63
RIB 61	130	10.50	13.50	1.77
RIB 70	140	12.00	15.00	2.18
RIB 71	148	12.00	15.00	2.28
RIB 72E	152	12.00	15.00	2.27
RIB 75	160	12.00	15.00	2.42
RIB 76	170	13.00	16.00	2.70





MXB

LCV

- Aggressive traction design
- Thick cross overs
- Designed for higher mileage capabilities
- Ideally suited for rear wheel
- Balanced on and off-road performance
- Designed for cooler running

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
MXB 150	150	12.20	15.70	2.35
MXB 160	160	12.30	15.90	2.49



SL & SL DT 71

LCV

- Aggressive traction design
- Thick cross overs
- Designed for higher mileage capabilities
- Ideally suited for rear wheel
- Balanced on and off-road performance
- Designed for cooler running

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
SL70	145	13.50	18.50	2.64
SL75 DT71	160	13.50	16.50	2.55






RL

LCV

- Good traction
- Maximized for cooler running with minimum trade-off
- Less prone to cutting and chipping
- Dependable, aggressive, open tread design
- Ideally suited for rear wheel

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
RL 70	145	13.50	17.50	2.29
RL 75	160	13.50	18.50	2.72

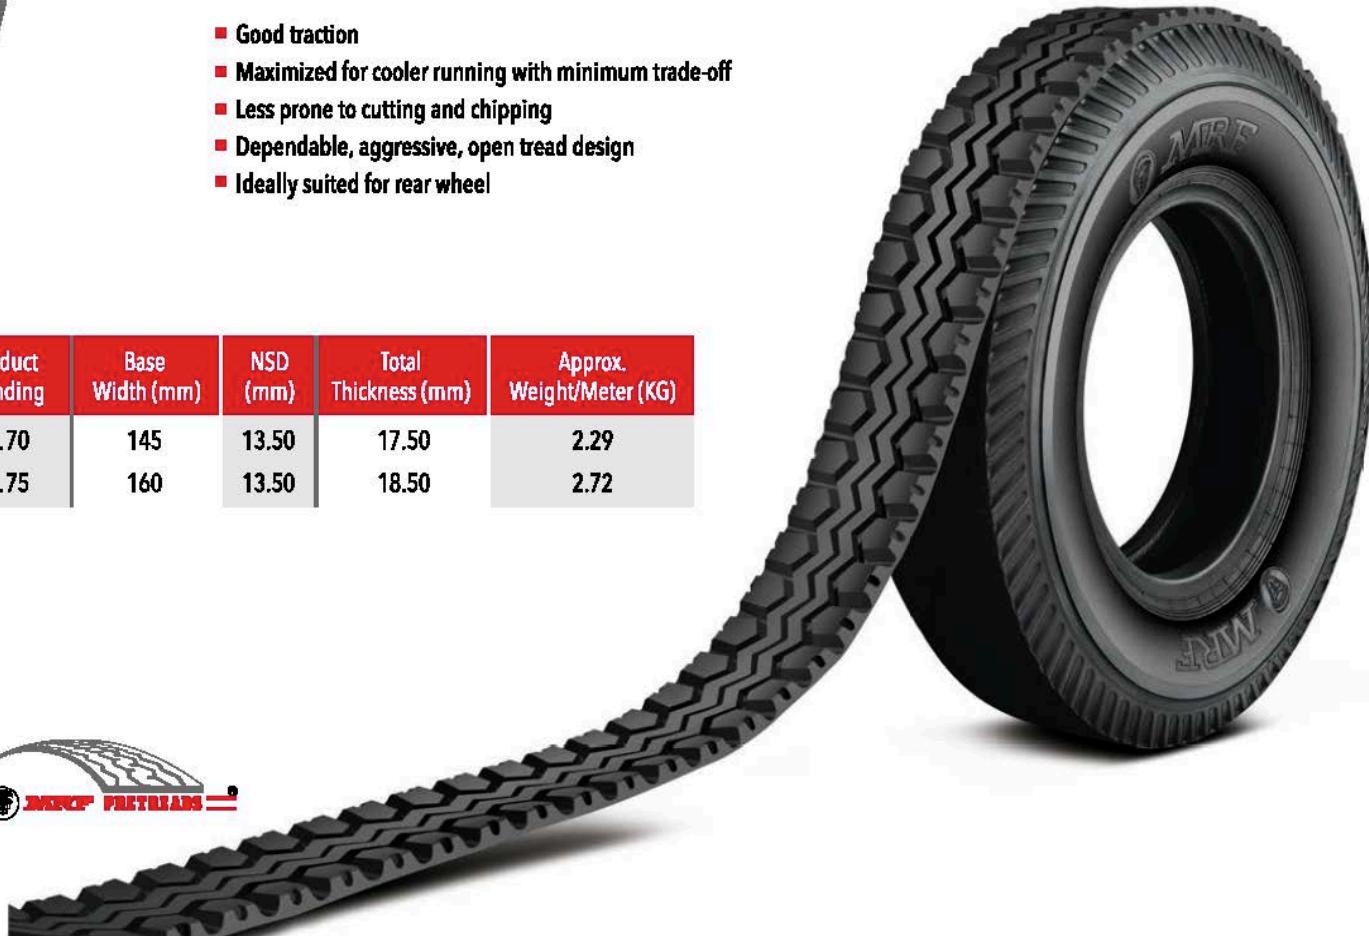



SLR

LCV

- Aggressive look
- Good traction with better road grip
- Ideally suited for rear wheel
- Optimized pattern for buses and trucks

Product Branding	Base Width (mm)	NSD (mm)	Total Thickness (mm)	Approx. Weight/Meter (KG)
SLR76	155	12.00	15.00	2.37





MRF Lanka (Private) Limited,

No.1, Dankotuwa Industrial Estate, Dankotuwa - 61130, Sri Lanka.

Ph: +94-31-5674745 / +94-31-7401030,

Marketing Division Chennai: Ph: +91-44-28292777, Ext. 339.

E-mail: mrfexpo@mrfmail.com | Website: www.mrftires.com/pretreads | www.mrlanka.com